

# 76×30 mm

San Ace B76 9BD type   



## General Specifications

- Material ..... Frame: Plastic (Flammability: UL 94V-0), Impeller: Plastic (Flammability: UL 94V-1)
- Expected life ..... See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage)
- Motor protection function ..... Locked rotor burnout protection, Reverse polarity protection  
For details, please refer to p. 547.
- Dielectric strength ..... 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and frame)
- Insulation resistance ..... 10 MΩ or more with a 500 VDC megger (between lead wire conductors and frame)
- Sound pressure level (SPL) ..... At 1 m away from the air inlet
- Storage temperature ..... -30 to +70°C (Non-condensing)
- Lead wire ..... ⊕Red ⊖Black or Blue (Sensor) Yellow
- Mass ..... 100 g

## Specifications

The models listed below **have pulse sensors**.

Model no.	Rated voltage [V]	Operating voltage range [V]	Rated current [A]	Rated input [W]	Rated speed [min <sup>-1</sup> ]	Max. airflow [m <sup>3</sup> /min] [CFM]	Max. static pressure [Pa] [inchH <sub>2</sub> O]	SPL [dB (A)]	Operating temperature [°C]	Expected life [h]
<b>109BD12HC2</b>	12	10.2 to 13.8	0.37	4.44	3000	0.36 12.7	151.9 0.61	41.5	-20 to +60	40000/60°C
<b>109BD12FC2</b>			0.27	3.24	2600	0.31 10.9	98 0.394	37		
<b>109BD12MC2</b>			0.14	1.68	2100	0.25 8.8	58.8 0.236	32.5		
<b>109BD24HC2</b>	24	20.4 to 27.6	0.17	4.08	3000	0.36 12.7	151.9 0.61	41.5	-20 to +60	
<b>109BD24FC2</b>			0.14	3.36	2600	0.31 10.9	98 0.394	37	-20 to +70	
<b>109BD24MC2</b>			0.1	2.4	2100	0.25 8.8	58.8 0.236	32.5	-20 to +70	

The following sensor and control options are available for selection.


Available for all models. **Without sensor** **Lock sensor**

Differs according to the model. Refer to the table on p. 561. **PWM control**

## Airflow - Static Pressure Characteristics


**109BD12HC2** With pulse sensor

Operating voltage range

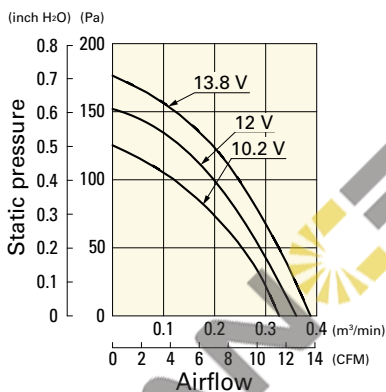


**109BD12FC2** With pulse sensor

Operating voltage range

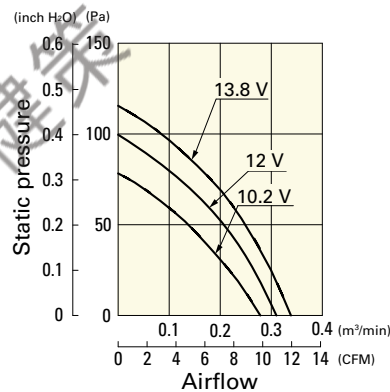

**109BD12MC2** With pulse sensor


Operating voltage range

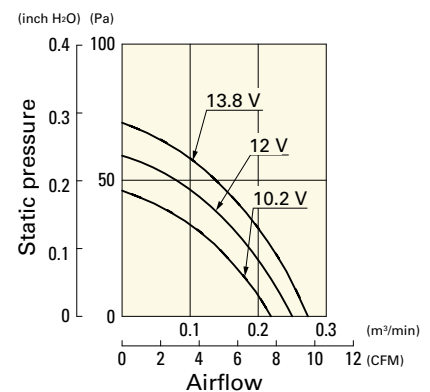

## Airflow - Static Pressure Characteristics


**109BD24HC2** With pulse sensor

Operating voltage range

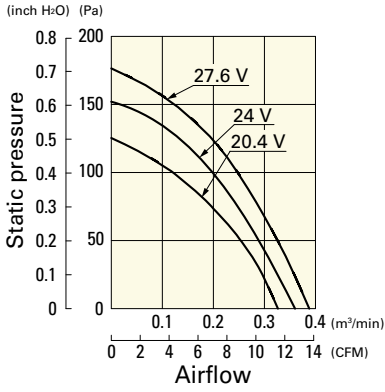


**109BD24FC2** With pulse sensor

Operating voltage range

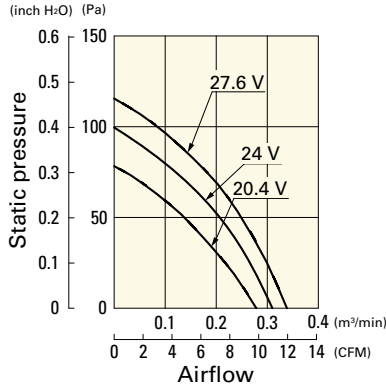


**109BD24MC2** With pulse sensor

Operating voltage range

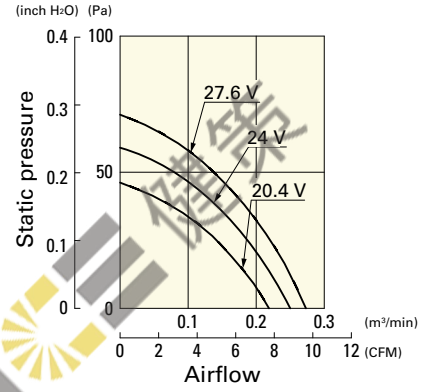

## Dimensions (unit: mm)

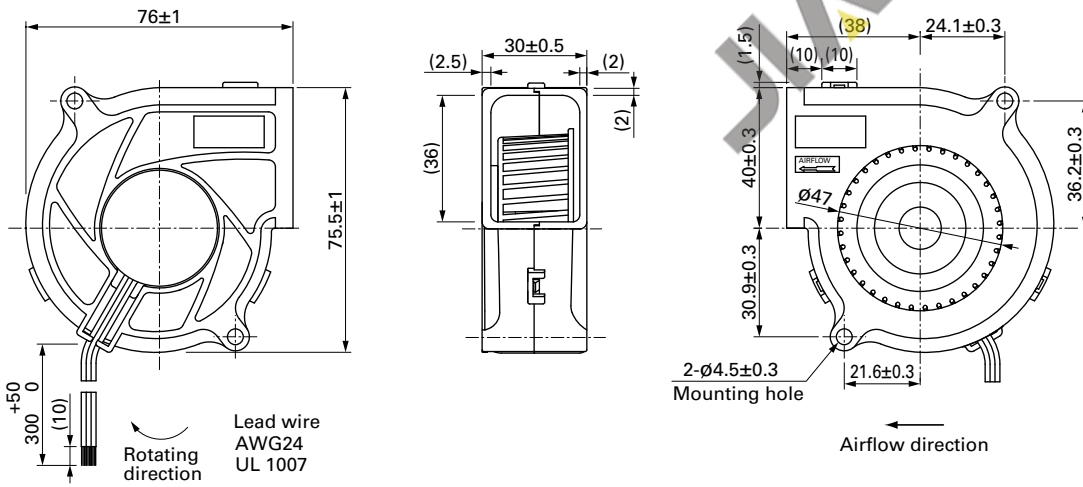

Blower 76 mm DC

JIAN 健策

JIAN 健策  
0755—23706799



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Sanyo Denki:

[109BD12FA2](#) [109BD12FC2](#) [109BD12FD2](#) [109BD12HA2](#) [109BD12HC2](#) [109BD12HD2](#) [109BD12MA2](#)  
[109BD12MC2](#) [109BD12MD2](#) [109BD24FA2](#) [109BD24FC2](#) [109BD24FD2](#) [109BD24HA2](#) [109BD24HC2](#) [109BD24HD2](#)  
[109BD24MA2](#) [109BD24MC2](#) [109BD24MD2](#) [109BD12P2H01](#)

JIAN 健策

JIAN 健策  
0755—23706799

