

38×38×48 mm

San Ace 38 9CRA type



General Specifications

- Material Frame: Plastic (Flammability: UL 94V-0), Impeller: Plastic (Flammability: UL 94V-1)
- Expected life See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage)
- Motor protection function Locked rotor burnout protection, Reverse polarity protection
For details, please refer to p. 547.
- Dielectric strength 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and frame)
- Insulation resistance 10 MΩ or more with a 500 VDC megger (between lead wire conductors and frame)
- Sound pressure level (SPL) At 1 m away from the air inlet
- Storage temperature -30 to +70°C (Non-condensing)
- Lead wire Inlet ⊕Red ⊖Black (Sensor) Yellow (Control) Brown
Outlet ⊕Orange ⊖Gray (Sensor) Purple (Control) White
- Mass 80 g

Specifications

The models listed below **have pulse sensors with PWM control function.**

Model no.	Rated voltage [V]	Operating voltage range [V]	PWM duty cycle* [%]	Rated current [A]	Rated input [W]	Rated speed [min ⁻¹] Inlet Outlet	Max. airflow [m³/min] [CFM]	Max. static pressure [Pa] [inchH ₂ O]	SPL [dB (A)]	Operating temperature [°C]	Expected life [h]
9CRA0312P4K03	12	10.8 to 13.2	100	1.5	18.0	17600 14520	0.77 27.2	700.0 2.81	64	-20 to +70	40000/60°C
0			0.2	2.4	5280 4200	0.22 7.8	54.9 0.22	33			
9CRA0312P4J03			100	1.1	13.2	16000 13200	0.7 24.7	560.0 2.25	62		
0			0.18	2.2	4800 3960	0.21 7.4	50.4 0.2	31			

* PWM frequency: 25 kHz


The following sensor and control options are available for selection.

Differs according to the model. Refer to the table on p. 567. **Without sensor** **Pulse sensor**


Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

9CRA0312P4K03 With pulse sensor with PWM control function


PWM duty cycle

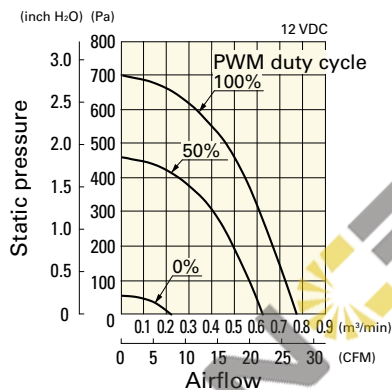

Operating voltage range

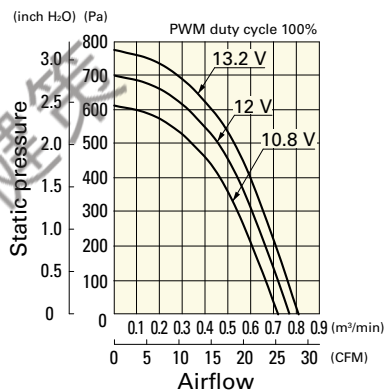


PWM duty - Speed characteristics example

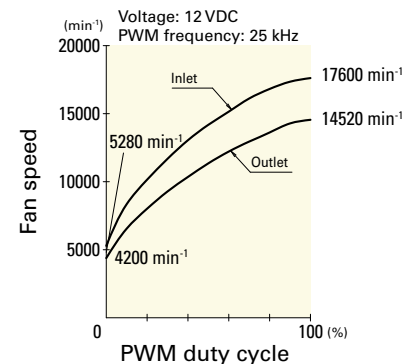


Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

9CRA0312P4J03 With pulse sensor with PWM control function


PWM duty cycle

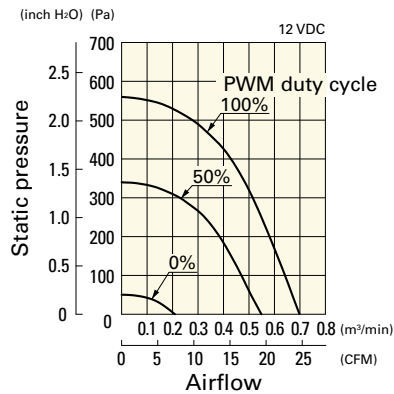


Operating voltage range

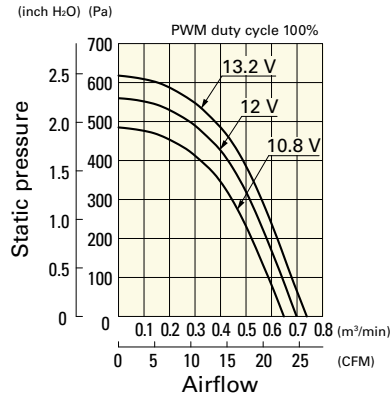


PWM duty - Speed characteristics example

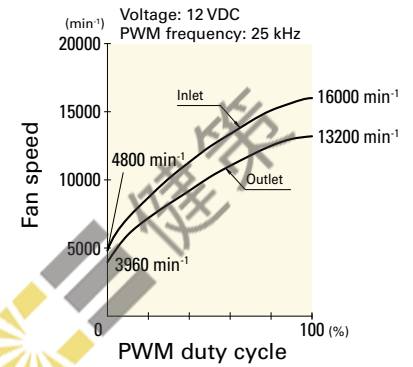

Dimensions (unit: mm)

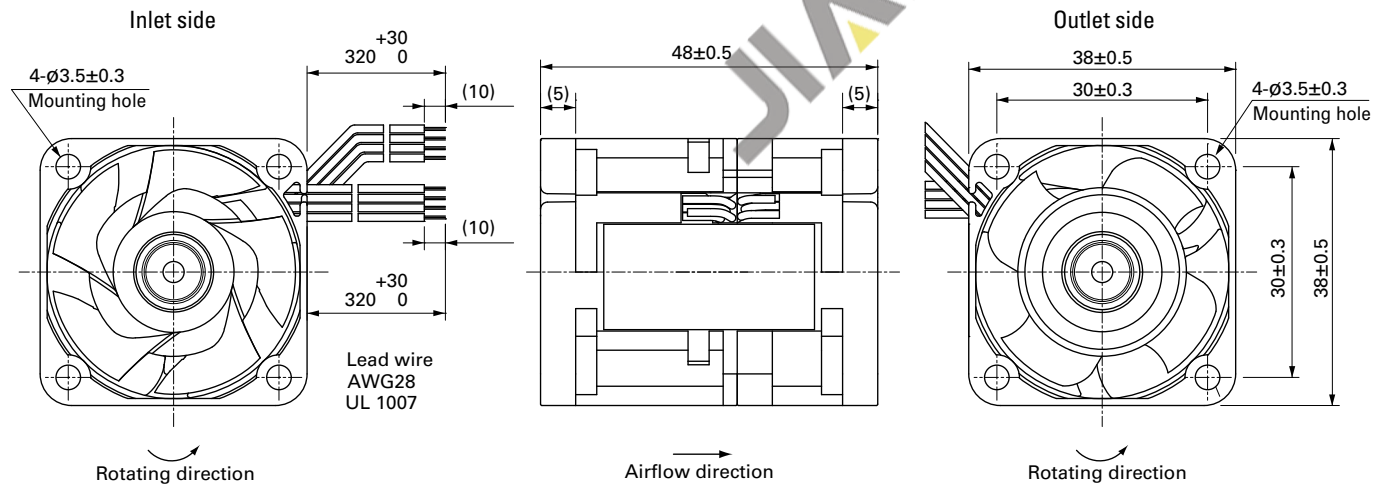

Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

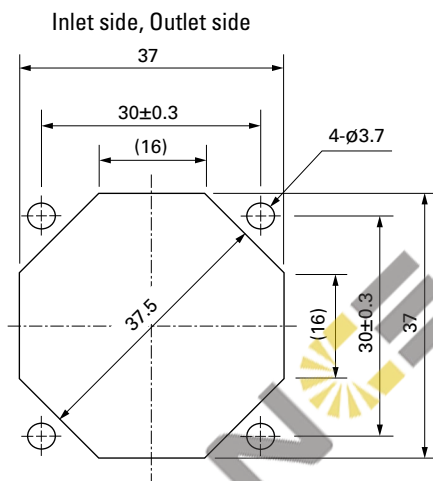

Options

Finger guards

page: p. 532

Model no.: 109-1065

JIAN 健策

0755—23706799

微信扫描
咨询工程师



DC

Counter Rotating Fan 38 mm sq.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Sanyo Denki:

[9CRA0312P4K03](#) [9CRA0312P4J03](#) [9CRA0312J401](#) [9CRA0312K401](#) [9CRA0312J402](#) [9CRA0312K402](#)

JIAN 健策

JIAN 健策
0755—23706799

