

San Ace 92

9RA type

DC Fan

Features

Low Noise and Energy Saving

Compared to our current model,⁽¹⁾ noise level has been more than halved⁽²⁾ and power consumption has been reduced by 44%.⁽³⁾

Moreover, the models with PWM control, which enables the control of fan speed, provide further optimized noise level and efficiency.

Long Life

This fan lasts 2 times longer than the current model,⁽¹⁾ and is capable of continuous operation for 60,000 hours (approximately 7 years), improving the maintainability.

Rich Lineup

The product lineup is available in a wide variety in 12/24/48 voltage, cooling performance, noise level, and PWM control. This allows users to choose the most suitable one for their applications.

(1) Current model: 92 × 92 × 25 mm San Ace 92 9A type DC Fan (model: 9A0912G401).

(2) A 4 dB(A) decrease in noise level.

(3) For models 9RA0912P4G001 and 9RA0912G4001



92 × 92 × 25 mm



Specifications

The models listed below **have ribs and pulse sensors with PWM control function**. For models without ribs, append "1" to the end of model numbers.

Model no.	Rated voltage [V]	Operating voltage range [V]	PWM duty cycle* [%]	Rated current [A]	Rated input [W]	Rated speed [min ⁻¹]	Max. airflow [m ³ /min] [CFM]	Max. static pressure [Pa] [inchH ₂ O]	Noise level [dB(A)]	Operating temperature [°C]	Expected life [h]
9RA0912P4G001	12	10.8 to 13.2	100	0.22	2.64	4200	1.8 63.5	73.5 0.29	37	-20 to +70	60000/60°C (90000/40°C)
			30	0.03	0.36	1000	0.42 14.8	4.1 0.016	11		
9RA0924P4G001	24	21.6 to 26.4	100	0.13	3.12	4200	1.8 63.5	73.5 0.29	37		
			20	0.03	0.72	1000	0.42 14.8	4.1 0.016	11		
9RA0948P4G001	48	43.2 to 52.8	100	0.07	3.36	4200	1.8 63.5	73.5 0.29	37		
			20	0.03	1.44	1400	0.6 21.2	8.1 0.033	14		

* PWM input frequency is 25 kHz; models without specifications at 0% PWM duty cycle have zero fan speed at 0%.

The models listed below **have ribs and pulse sensors**. For models without ribs, append "1" to the end of model numbers.

Model no.	Rated voltage [V]	Operating voltage range [V]	Rated current [A]	Rated input [W]	Rated speed [min ⁻¹]	Max. airflow [m ³ /min] [CFM]	Max. static pressure [Pa] [inchH ₂ O]	Noise level [dB(A)]	Operating temperature [°C]	Expected life [h]
9RA0912G4001	12	7 to 13.8	0.22	2.64	4200	1.8 63.5	73.5 0.29	37	-20 to +70	60000/60°C (90000/40°C)
9RA0912S4001			0.2	2.4	3850	1.65 58.3	61.7 0.25	35		
9RA0912H4001			0.14	1.68	3400	1.46 51.6	48.1 0.19	31		
9RA0912F4001			0.1	1.2	2850	1.22 43.1	33.8 0.14	27		
9RA0912M4001			0.07	0.84	2450	1.05 37.1	25 0.1	23		
9RA0924G4001	24	14 to 27.6	0.13	3.12	4200	1.8 63.5	73.5 0.29	37		
9RA0924S4001			0.1	2.4	3850	1.65 58.3	61.7 0.25	35		
9RA0924H4001			0.08	1.92	3400	1.46 51.6	48.1 0.19	31		
9RA0924F4001			0.06	1.44	2850	1.22 43.1	33.8 0.14	27		
9RA0924M4001			0.04	0.96	2450	1.05 37.1	25 0.1	23		
9RA0948G4001	48	36 to 55.2	0.07	3.36	4200	1.8 63.5	73.5 0.29	37		
9RA0948S4001			0.06	2.88	3850	1.65 58.3	61.7 0.25	35		
9RA0948H4001			0.05	2.4	3400	1.46 51.6	48.1 0.19	31		

Models with the following sensor specifications are also available as options: **Without sensor** **Lock sensor**

Common Specifications

- ☐ Material Frame: Plastic (Flammability: UL 94V-0), Impeller: Plastic (Flammability: UL 94V-1)
- ☐ Expected life Refer to specifications
(L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage)
Expected life at 40°C is for reference only.
- ☐ Motor protection function Locked rotor burnout protection, Reverse polarity protection
- ☐ Dielectric strength 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and frame)
- ☐ Insulation resistance 10 MΩ or more with a 500 VDC megger (between lead wire conductors and frame)
- ☐ Noise level At 1 m away from the air inlet
- ☐ Operating temperature Refer to specifications (Non-condensing)
- ☐ Storage temperature -30 to +70°C (Non-condensing)
- ☐ Lead wire ⊕ Red ⊖ Black **[Sensor]** Yellow **[Control]** Brown
- ☐ Mass 130 g

JIAN 健策




0755—23706799

微信扫码
咨询工程师












Airflow - Static Pressure Characteristics


PWM duty cycle

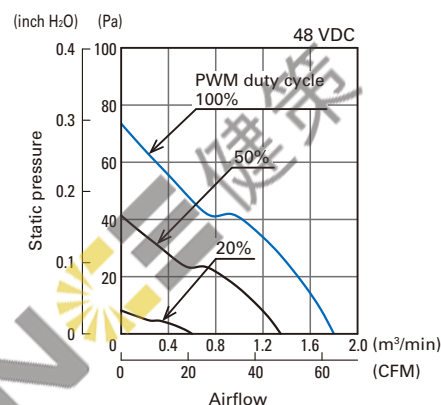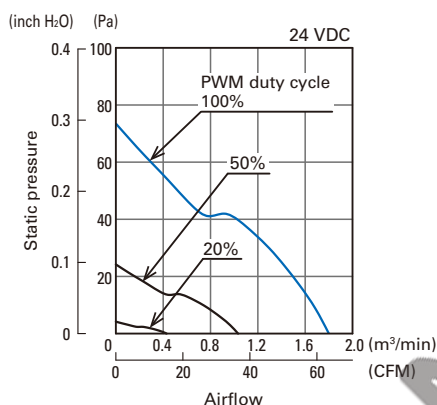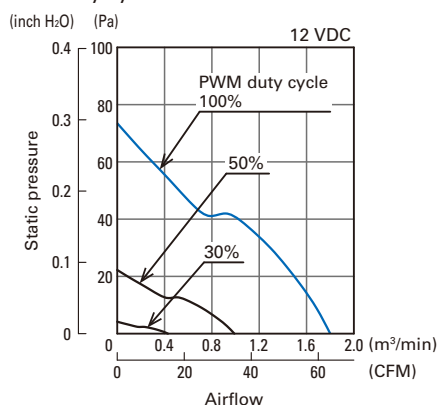

Operating voltage range

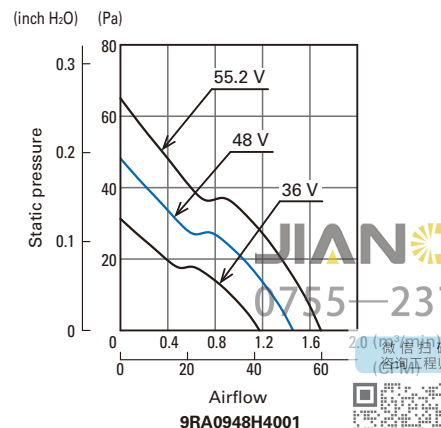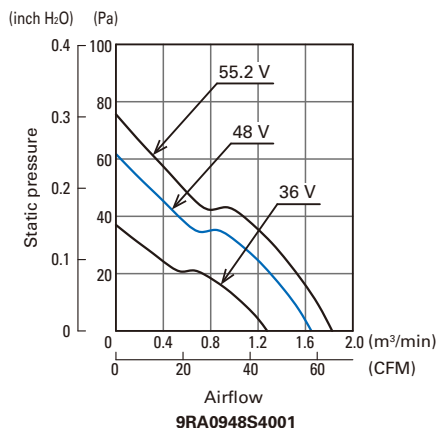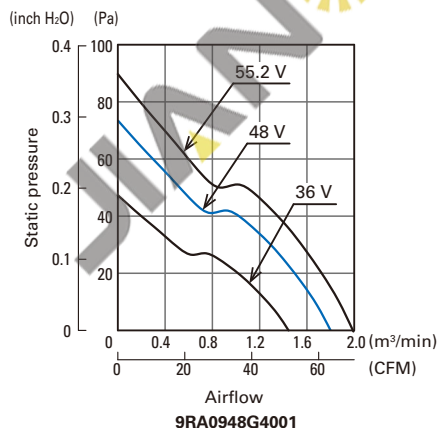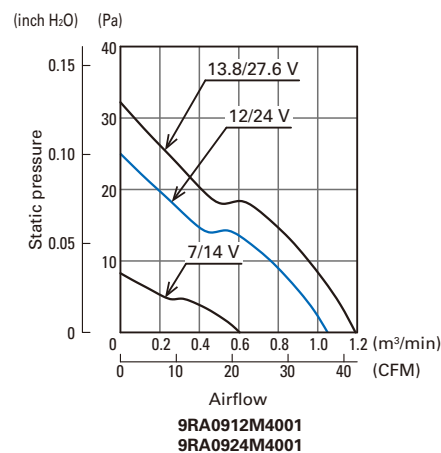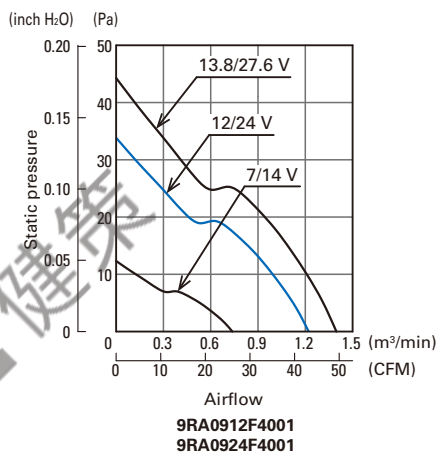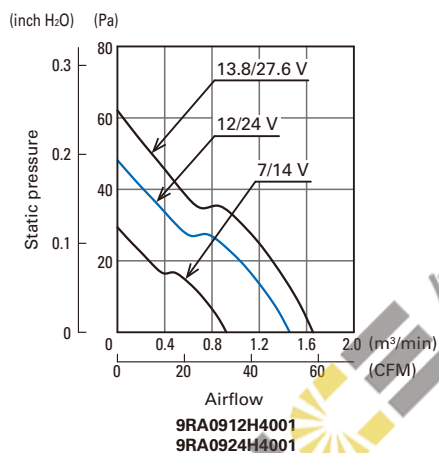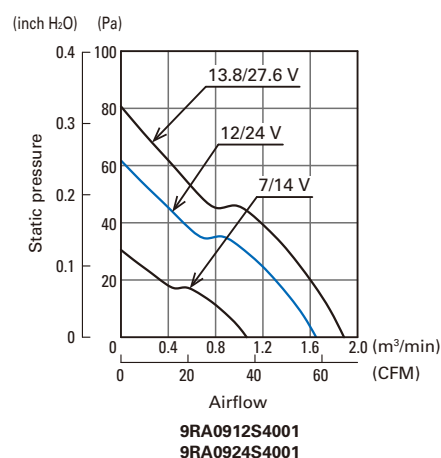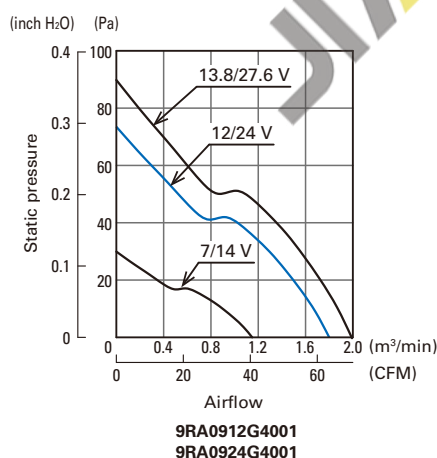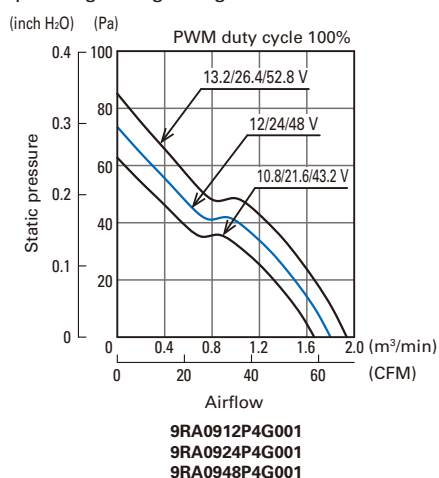


PWM Duty - Speed Characteristics Example

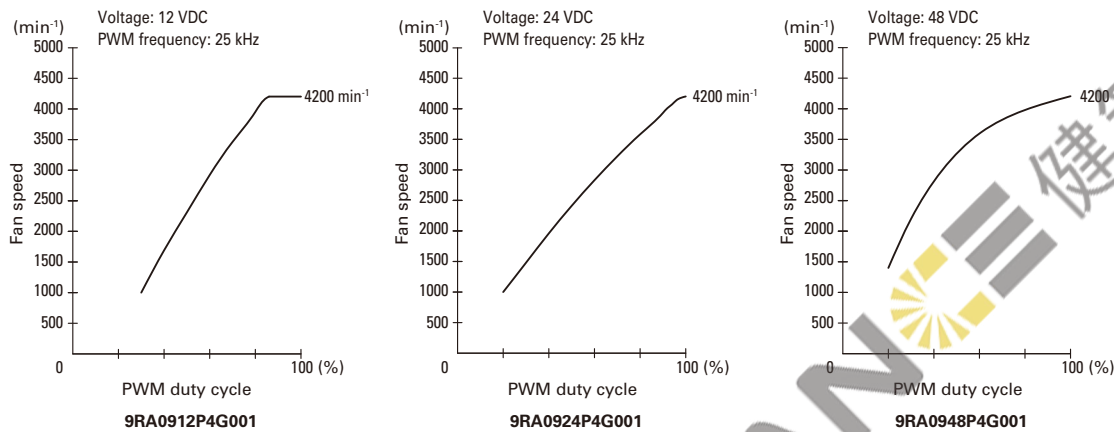

PWM Input Signal Example

Input signal waveform

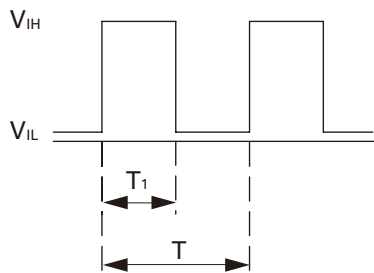

$$V_{IH} = 4.75 \text{ to } 5.25 \text{ V} \quad V_{IL} = 0 \text{ to } 0.4 \text{ V}$$

$$\text{PWM duty cycle (\%)} = \frac{T_1}{T} \times 100 \quad \text{PWM frequency } 25 \text{ (kHz)} = \frac{1}{T}$$

Current source (I_{source}) = 1.0 mA max. (when control voltage is 0 V)

Current sink (I_{sink}) = 1.0 mA max. (when control voltage is 5.25 V)


When the PWM control terminal is open,

the fan speed is the same as the speed at 100% PWM duty cycle.


Either a TTL input or open collector/drain input can be used for the PWM input signal.

Example of Connection Schematic


Rated voltage 12 V fan

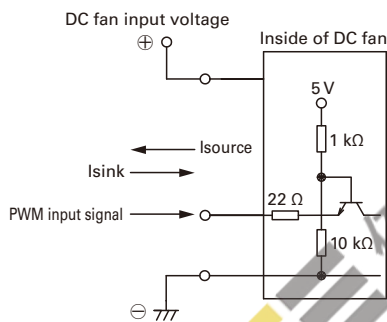

Rated voltage 24 V fan

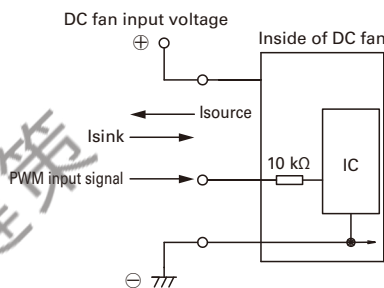


Rated voltage 48 V fan

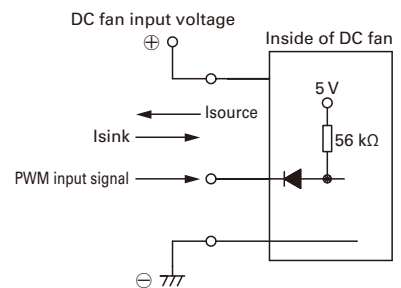

Specifications for Pulse Sensors


Output circuit: Open collector

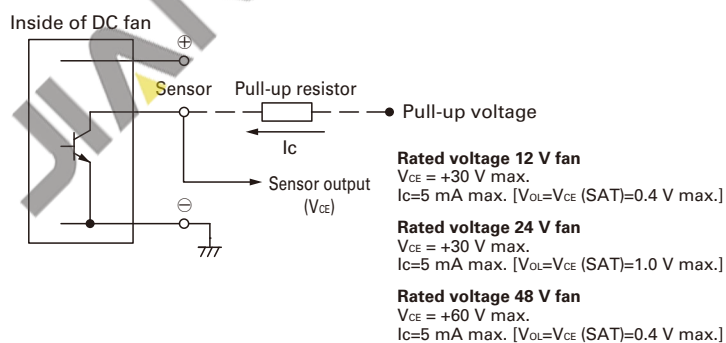

Output waveform (Need pull-up resistor)

In case of steady running

(One revolution)



$$T_1 \text{ to } 4 \approx (1/4) T_0$$

$$T_1 \text{ to } 4 \approx (1/4) T_0 = 60/4N \text{ (s)}$$


$$N = \text{Fan speed (min}^{-1}\text{)}$$

0755—23706799


微信扫码
咨询工程师



■ Dimensions (unit: mm) (With pulse sensor with PWM control function)

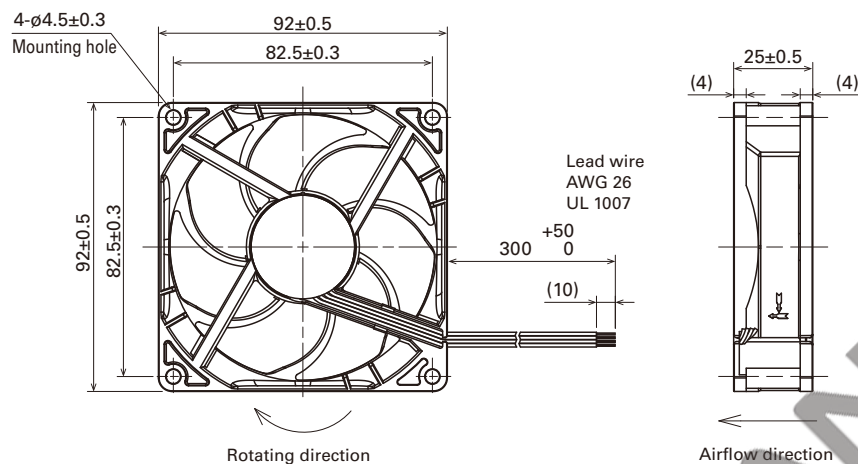

■ Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

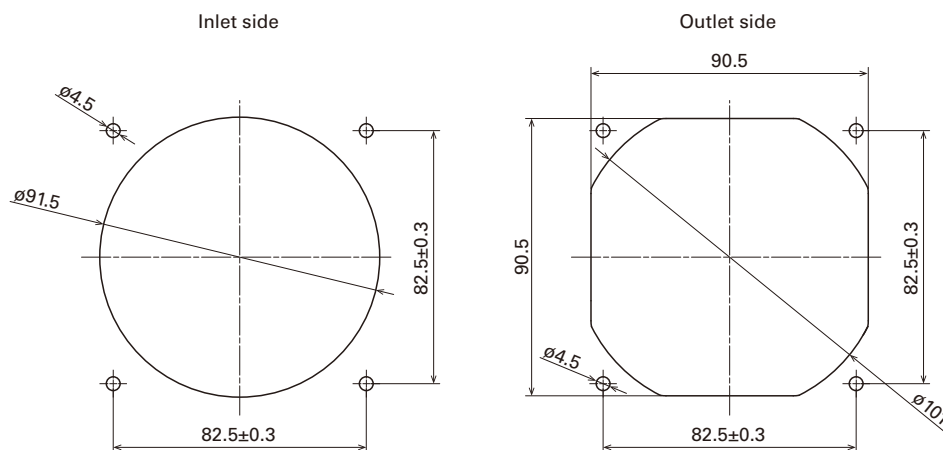

Notice

- Please read the "Safety Precautions" on our website before using the product.
- The products shown in this catalog are subject to Japanese Export Control Law. Diversion contrary to the law of exporting country is prohibited.
- For protecting fan bearings against electrolytic corrosion near strong electromagnetic noise sources, we provide effective countermeasures such as Electrolytic Corrosion Proof Fans and EMC guards. Contact us for details.

SANYO DENKI CO.,LTD. 3-33-1 Minami-Otsuka, Toshima-ku, Tokyo 170-8451, Japan TEL: +81 3 5927 1020

The names of companies and/or their products specified in this catalog are the trade names, and/or trademarks and/or registered trademarks of such respective companies.

"San Ace" is a trademark of SANYO DENKI CO.,LTD.

Specifications are subject to change without notice.

JIAN 健策

0755—23706799

微信扫码
咨询工程师



CATALOG No. C1

<https://www.sanyo-denki.com>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Sanyo Denki:

[9RA0912F4001](#) [9RA0912F40011](#) [9RA0912G4001](#) [9RA0912G40011](#) [9RA0912H4001](#) [9RA0912H40011](#)
[9RA0912M4001](#) [9RA0912M40011](#) [9RA0912P4G001](#) [9RA0912P4G0011](#) [9RA0912S4001](#) [9RA0912S40011](#)
[9RA0924F4001](#) [9RA0924F40011](#) [9RA0924G4001](#) [9RA0924G40011](#) [9RA0924H4001](#) [9RA0924H40011](#)
[9RA0924M4001](#) [9RA0924M40011](#) [9RA0924P4G001](#) [9RA0924P4G0011](#) [9RA0924S4001](#) [9RA0924S40011](#)
[9RA0948G4001](#) [9RA0948G40011](#) [9RA0948H4001](#) [9RA0948H40011](#) [9RA0948P4G001](#) [9RA0948P4G0011](#)
[9RA0948S4001](#) [9RA0948S40011](#)

JIAN 健策

JIAN 健策
0755—23706799

